


"ONE BRAND "ONE SOURCE "ONE SYSTEM

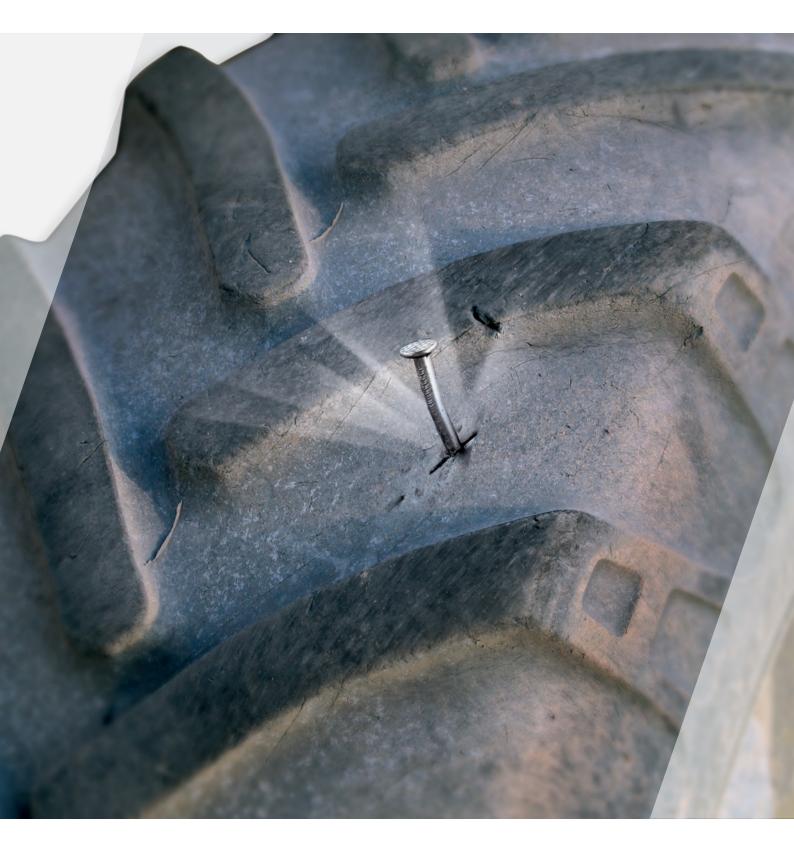

TYRE SEALANT TT SEAL XXL

The preventive tyre sealant for OTR-/EM and agricultural tyres with tread punctures up to 8 mm damage to the casing.

TYRE SEALANT TT SEAL XXL

Benefits

- Expensive downtime to the vehicle is avoided
- Easy application into intact tyres by use of the hand pump
- Repairs inside the tyre are not adversely affected
- Effective for the whole lifetime of the tyre
- Tyres filled with TT SEAL XXL continue to be fully retreadable and repairable
- · Reduces the risk of slinking deflation

A preventive measure

- The preventive viscous tyre sealant TT SEAL XXL is preventively filled into the intact tyres, through the inflation valves, using a hand pump
- During wheel rotation, the TT SEAL XXL flows over the tread inside the tyre, while ready to immediately seal an up-to-8 mm injury to the casing
- TT SEAL XXL contains microfibres.
 As soon as a puncture occurs, the tyre inflation pressure squeezes them automatically into the injury
- The liquid ingredients of TT SEAL XXL come out as drops on the tyre outside, where they dry
- The microfibres durably seal the puncture channel, while staying elastic enough to easily withstand any tyre flexing strain
- TT SEAL XXL is approved for a speed of up to 40 km/h



593 1252 TT SEAL XXL 20 | PE-barrel



593 1277 TT SEAL XXL hand pump



593 1284 Valve adapter

Reference Numbers and Description

- · **593 1252** TT SEAL XXL 20 I PE-barrel
- · **593 1260** TT SEAL XXL 60 | PE-barrel

Recommended accessories

- 593 1277 TT SEAL XXL hand pump capacity 100 ml per stroke (suitable for 20 I and 60 I PE-barrel)
- 593 1284 Valve adapter, from hand pump hose to valve (including reducer from VG12 to VG8)



REMA TIP TOP AG

Gruber Strasse 65 · 85586 Poing / Germany

Phone: +49 8121 707-100 Fax: +49 8121 707-10 222

info@tiptop.de www.rema-tiptop.com



581 3251 – III.19 Printed in Germany